





ARCHITECTURAL SERIES | SERIES 467

ARCHITECTURAL AWNING/CASEMENT WINDOW (TRUTH™ HARDWARE)

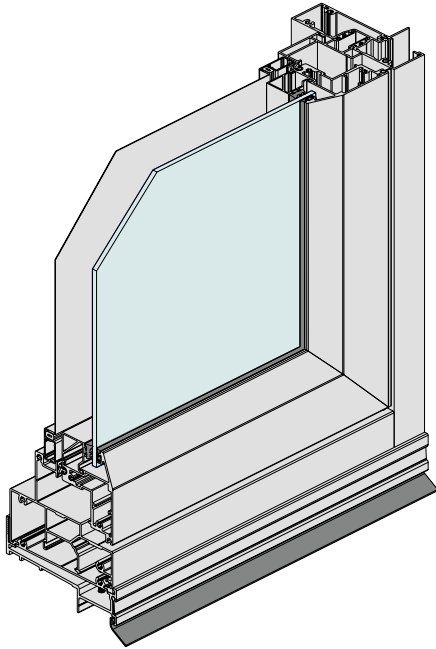


KEY FEATURES

- This high-performance awning and casement window has been designed to accept Truth™ hardware. This allows us to offer very large casements and awnings fitted with scissor type winders with jamb to stile latches that secure the sashes in the closed position.
- Fixed sidelights/lowlights and highlights can be single or double glazed.
- Perimeter frame designed to make installation into brick veneer and cavity brick easier with built-in nailing fins.
- The Truth™ hardware can resist very negative wind loads with the use of winders and side latches.
- Hardware comes in standard E-GARD™ or for extreme locations we also offer 304 stainless steel stays.
- Series 467 accepts flyscreens.
- On casements it's possible to clean the external glass face when the sash is in the 90° open position.
- Sub-sills are standard on Series 467.



Custom sub-sill (flashing tray) standard on 467 windows.



The heavy duty sash designed for oversize sashes. The image above shows optional screen nested into frame. Flyscreen can be fitted to awnings and casement windows.



Standard 30mm jamb with built-in nailing fin/weather bar into brick veneer wall illustrated above.



Series 467 has bold commercial frame. Alternative 44mm bold frame shown above.

GENERAL

NB: Maximum panel height and width of Awning sashes are interdependent.

Max Panel Height*
A/ @2400w = 800H
C/ 2100mm

Max Panel Width*
A/ @2100h = 1200w
C/ 1200mm

Max Glass Thickness
24mm

Frame Depth
102mm

ENERGY
UW Range
4.2-7.0

SHGC Range
0.14-0.57

WEATHER

Maximum Water
450 Pa.

ACOUSTICS

This product has not been acoustics tested. AWS anticipates this product's acoustic performance will be in-line with Series 466.

