



ARCHITECTURAL SERIES | SERIES 650
ARCHITECTURAL HINGED DOOR

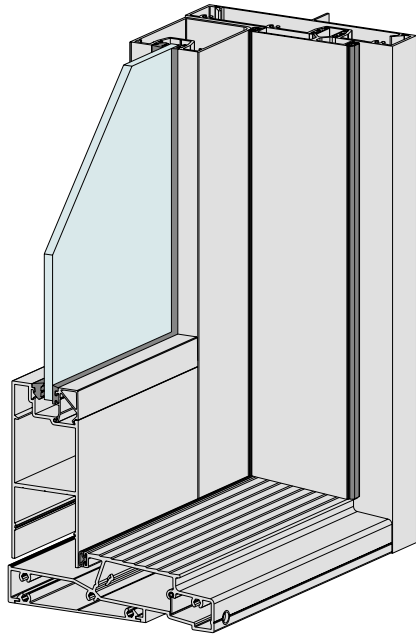


KEY FEATURES

- Entry door framing system designed to accept heavy duty 50mm thick commercial swing doors.
- These heavy duty 50mm thick commercial doors are ideal for oversize door panels.
- Series 52 swing doors will accept 24mm thick insulating glass.
- Four midrail sizes to choose from (50, 115, 125 and 200mm deep).
- Two door thresholds designed to keep water out cover both internal and external swing hinged doors.
- Sub-sills available for high performance installations.
- Snap-fit nailing fin adaptor for brick veneer and cavity brick installations.
- Sidelights will accept awning and/or casement sashes.
- Recessed clean fixed sidelights and highlights pocket glazed similar to commercial framing.
- Can be fitted with hinged flydoors within the main frame.




Unique double-sided door stops allow for easy fitting of hinged screen doors.



Externally opening door sill.



Internally opening door sill.



Custom true French meeting stiles designed to improve water resistance.

GENERAL

Max Panel Height*
3000mm

Max Panel Width*
1000mm

Max Glass Thickness
28mm

Frame Depth
150mm

ENERGY

UW Range
4.3-6.0

SHGC Range
0.26-0.60

WEATHER

Maximum Water
300 Pa. (open in)
150 Pa. (open out)

ACOUSTICS

This product has not been acoustics tested.



*Dimensions subject to individual site conditions.

BAL-40 compliance may limit glass options. Maximum glass size for BAL-40 products is 4.5m2.